

UTILMD

Utility Master Data Message

Danish EDI Message Implementation Guide for the Gas
Market

Version: 2
Release: 3
Date: Marts 22, 2013

1. Introduction and general principles

The EDIFACT specification in the following chapters is based on the *Message handbook for ebIX - Implementation guide for Utility Master Data Message (UTILMD)*, version 5.0, revision B.

Detailed explanations of the individual segments are not provided in this specification, but are to be found in the above-mentioned document.

2. Data model for UTILMD

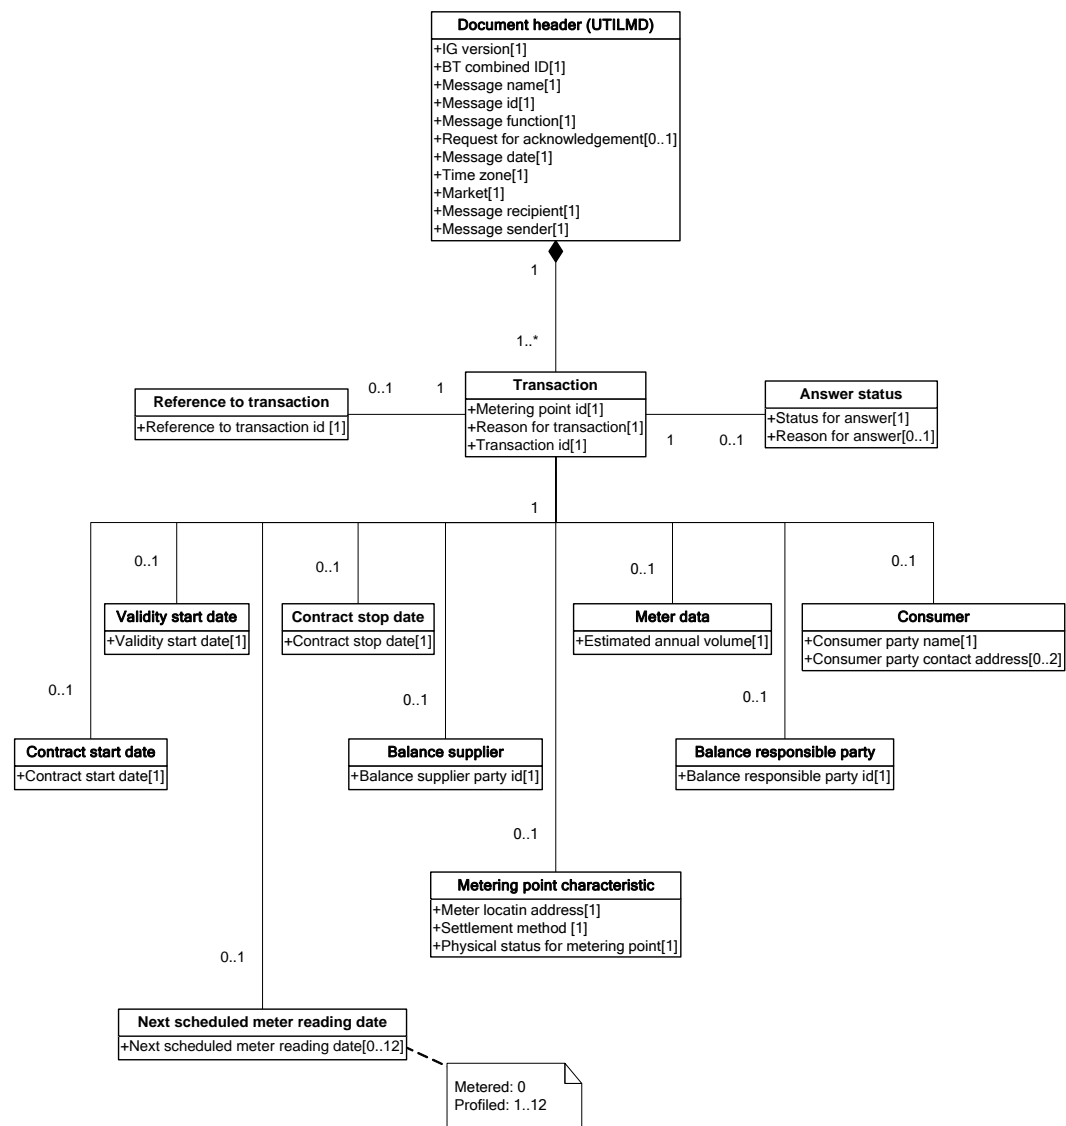


Figure 1: Common data model for UTILMD

3. Mapping table for UTILMD

Segment	Data Element		Description	Attribute	
	Identification	Content			
SG 0 UNH	0062	Message reference, e.g. '1'	A unique reference for the message within the interchange.	<i>Not specified in the dependency matrix, but must be included in the message</i>	
	S009 0065 S009 0052 S009 0054 S009 0051 S009 0057	'UTILMD' 'D' '02B' 'UN' 'E5DK02'	The version number of this guide should be stated here. The number consists of "E5" for EDI version 5, "DK" for Danish and "02" for version number 2.	IG version	
	0068	Business Transaction Combined id.	Unique identification of the business transaction and version, e.g. "DK-BT-001-003"	BT combined ID	
	SG 0 BGM	C002 1001	'392' = Request to metering point administrator of start of supply (Notification of change of supplier) '406' = Information or confirmation of end of supply (Notification to supplier of contract termination) '414' = Confirmation of start of supply, may include master data for a metering point (Acknowledgement of change of supplier) '432' = Notification to grid operator of end of supply 'E07' = Master data, metering point	EDIFACT- or EDI-code for the identification of the message in relation to the actual business transaction.	Message name / Meddelelse navn
		C002 3055	'260' = Ediel Nordic Forum	Code list responsible agency code. Only to be used for Exx codes	
1004		Message id, e.g. 'SPH1234'	A unique (business related) reference for the message over time.	Message id / Meddelelsesidentifikation	
1225		'9' = Original message	Statement of that the message is a creation (9).	Message function	
4343		'NA' = No acknowledgement needed 'AB' = Message acknowledgement is required	Statement of whether the message sender wants an acknowledgement for reception of the message by the application. This is only used on a bilateral agreement.	Request for Acknowledgement / Anmodning om kvittering	
SG 0 DTM Occurrence 1	C507 2005 C507 2380 C507 2379	'137' = Message date and time Actual date and time '203' = Format: CYYMMDDHHmm	Date and the time for composition of the message.	Message date / Meddelelsesdato	

Segment	Data Element		Description	Attribute
	Identification	Content		
SG 0 DTM Occurrence 2	C507 2005	'735' = Deviation from UTC	Defines the offset to UTC used for all dates, times and periods in the message. The offset must be expressed in the format ZHHMM, where Z is plus (+) or minus (-). In this guide only '+0000' must be used. The time zone should always be UTC format.	Time zone / Tidssone
	C507 2380	'+0000' = UTC		
	C507 2379	'406' = Format ZHHMM		
	C507 2380	Actual date and time		
	C507 2379	'203' = Format: CCYYMMDDHHmm		
SG 0 MKS	7293	'27' = Gas supply industry	Descriptions of the market relevant for the current message.	Market / Marked
	C332 3496	'E01' = Structuring phase		
	C332 3055	'260' = Ediel Nordic Forum		
SG 2 NAD Occurrence 1	3035	'MR' = Message recipient	The party id of the recipient of the message. Both EAN-GLN and EIC can be used.	Message recipient / Modtager af meddelelse
	C082 3039	Recipient's party id		
	C082 3055	'9' = EAN (International Article Numbering association) '305' = ETSO (EIC, ETSO identification code)		
SG 2 NAD Occurrence 2	3035	'MS' = Message sender	The party id of the sender of the message. Both EAN-GLN and EIC can be used.	Message sender / Afsender af meddelelse
	C082 3039	Sender's party id		
	C082 3055	'9' = EAN (International Article Numbering association) '305' = ETSO (EIC, ETSO identification code)		
SG 4 IDE	7495	'24' = Transaction	The sender's unique identification of the transaction. Can be e.g. "Message id" and line number. Is used as reference when answering.	Transaction id / Transaktions-id
	C206 7402	Unique transaction id		
SG 4 DTM Occurrence 1	C507 2005	'92' = Contract start date / Kontrakt start dato	Date and time in UTC format for start of supply. Date must be stated as start of a local day where there will be supply, e.g. 200302010500 and 200306010400.	Contract start date / Kontrakt start dato
	C507 2380	Date		
	C507 2379	'203' = Format CCYYMMDDHHMM		
SG 4 DTM Occurrence 2	C507 2005	'93' = Contract stop date / Kontrakt stop dato	Date and time in UTC format for end of supply. Date must be stated as start of the day where there is no supply, e.g. 200301310500 and 200303310400.	Contract stop date / Kontrakt slut dato
	C507 2380	Date		
	C507 2379	'203' = Format CCYYMMDDHHMM		
SG 4 DTM Occurrence 3	C507 2005	'157' = Validity start date / Gyldighedsdato	Date and time in UTC format to indicate from when data for this transaction is valid. If more data are modified with different validity dates, these must be sent as separate transactions. Time must always be equal to gas day local time.	Validity start date / Gyldighedsdato
	C507 2380	Date		
	C507 2379	'203' = Format CCYYM MDDHHMM		

Segment	Data Element		Description	Attribute
	Identification	Content		
SG 4 DTM Occurrence 4	C507 2005	'752' = Meter reading date, next scheduled / Aflæsningsdag	<p>List of days in the year when the periodical meter reading will take place for the profiled settled metering point. Repeated for every meter reading date in the year. If done at the end of a month, the first date in the next month is used. For metering points that are not read, it is the date when consumption is calculated. Not mentioned for time-series settled metering point.</p> <p>The date is in local time, must not be changed by receiving system.</p>	Next scheduled meter reading date / Aflæsningsdag
	C507 2380	Date		
	C507 2379	'106' = Format MMDD		
SG 4 STS Occurrence 1	C601 9015 C556 9013	<p>'7' = Transaction</p> <p>'E01' = Move / Flytning</p> <p>'E03' = Change of supplier / Leverandørskifte</p> <p>'E05' = Cancellation of transaction / Annullering af tidligere transaction</p> <p>'E06' = Unrequested Change of supplier / Overflytning til Forsyningspligtselskab</p> <p>'E20' = End of supply / Ophør af leverance</p> <p>'E32' = Update of master data, metering point / Stamdata sendt efter aftale</p> <p>'Z02' = Change of meter location address / Målepunkt adresse ændret</p> <p>'Z03' = Change of next scheduled meter reading date / Aflæsningdag(e) ændret</p> <p>'Z04' = Change of estimated annual volume / Forventet årsforbrug ændret</p> <p>'Z05' = Change of consumer party name / Disponentnavn(e) ændret</p> <p>'Z06' = Change of physical status for metering point / Tilslutningsstatus ændret</p> <p>'Z07' = Change of settlement method / Målepunkt afregningsform ændret</p> <p>'Z08' = Terminal date changed / Skæringsdato ændret</p>	<p>The reason for exchange of the information (transaction) for the concerned metering point.</p> <p>Note that E05 can be used only for cancellation of an already sent message</p> <p>When codes beginning with "Z" are used, 'DK' must be stated as Code list responsible agency code.</p>	Reason for transaction / Transaktionsårsag

Segment	Data Element		Description	Attribute
	Identification	Content		
		'Z09' = Request for closure / Anmodning om lukning fra Forsyningspligtselskab 'Z10' = Termination of metering point / Nedlæggelse af Målersted		
	C556 3055	'260' = Ediel Nordic Forum 'DK' = Danish ebIX Group		
SG 4 STS Occurrence 2	C601 9015	'E01' = Answer	The status for a response to a previous transaction, i.e. approved or rejected	Status for answer / Svarstatus
	C601 3055	'260' = Ediel Nordic Forum		
	C555 4405	'39' = Approved '41' = Rejected		
	C556 9013	'E10' = Installation address or metering point not identifiable / Målepunkt ikke identificerbart 'E16' = Unauthorised supplier / Ikke godkendt leverandør 'E17' = Requested switch date not within time limits / Anmodet skæringsdato ikke inden for tidsfrist 'E18' = Unauthorised Balance responsible / Ikke godkendt balanceansvarlig 'E22' = Metering point blocked for switching / Målepunkt blokeret for skift 'E59' = Already existing relation (rejection) / Leverandøren er allerede leverandør 'Z11' = Consumer name missing (rejection) / Disponentnavn mangler	The reason for an answer, used to describe an error code for the Status for answer '41 (rejected)*.	Reason for answer / Begrundelse for svar
	C556 3055	'260' = Ediel Nordic Forum		
SG 5 LOC	3227	'172' = Metering point id	Identification of the metering point. Every metering point has a unique EAN-GSRN-number of 18 digits.	Metering point id / Målepunkt-id
	C517 3225	EAN-GSRN-number of Metering point.		
	C517 3055	'9' = EAN (International Article Numbering association)		
SG 6 RFF	C506 1153	'TN' = Reference to transaction id	Reference to a received transaction id.	Reference to transaction id / Transaktions-id
	C506 1154	Transaction id		
SG 7 CCI Occurrence 1	C240 7037	'E02' = Settlement method	The method used for settlement, such as profiled or non-profiled. E15 states a metering point settled on a net basis.	Settlement method / Afregningsmåde
	SG 7	C889 7111		

Segment	Data Element		Description	Attribute
	Identification	Content		
CAV Occurrence 1		'E15' = Non-profiled, netto / Nettoafregnet		
SG 7 CCI Occurrence 2	C240 7037	'E15' = Physical status for metering point	Physical status of the Metering point, such as connected or disconnected	Physical status for metering point / Tilslutningsstatus
SG 7 CAV Occurrence 2	C889 7111	'E22' = Connected / Målepunkt tilsluttet 'E23' = Disconnected / Målepunkt afbrudt		
SG 8 SEQ	C286 1050	'1' = Register number		<i>Not specified in the dependency matrix, but must be included in the message if SG9/QTY is used</i>
SG 9 QTY	C186 6063 C186 6060 C186 6411	'31' = Estimated annual volume Quantity 'KWH' = Kilowatt-hour	Annual volume for the last year or the expected annual volume if it is believed to change. Stated in kWh without decimals.	Estimated annual volume / Forventet årsforbrug
SG 12 NAD Occurrence 1	3035 C082 3039 C082 3055	'DDK' = Balance responsible party / Balanceansvarlig Balance responsible ID '9' = EAN (International Article Numbering association) '305' = ETSO (EIC, ETSO Identification Code)	The party id of the Balance Responsible Party for the metering point. Both EAN-GLN and EIC can be used.	Balance responsible party id / Balanceansvarlig id
SG 12 NAD Occurrence 2	3035 C059 3042 C059 3042 C059 3042 C059 3042 3164 3251	'IT' = Metering point address (Installation on site) Street name line 1 Street name line 2 House number Coded address City name (fx Fredericia) Postal code (fx 7000)	Address for a metering point. Specified as the name of the street in up to two data elements and the street number including house number, floor, direction and door number. Note, it is not allowed to include local City names in the Street name lines. The fourth repetition of	Meter location address / Målepunkt adresse

Segment	Data Element		Description	Attribute
	Identification	Content		
	3207	DK	C059/3042 must state coded address configured as address codes from the CPR register separated by semicolon as follows: Municipality code; (n4) Street code; (n4) House number; (an4) Floor; (an4) Direction/door number; (an4) Country code must be stated as two letter ISO 3166 country code.	

Segment	Data Element		Description	Attribute
	Identification	Content		
SG 12 NAD Occurrence 3	3035	'UD' = Consumer, address for correspondence (Ultimate customer)	This is the name of the person/company that is allowed to choose a Balance Supplier for a metering point. If a coordinated person is registered, the name of this person can either be a part of the part name or be an independent name.	Consumer party name / Disponentnavn
	C080 3036	Consumer party name / Disponentnavn		
	C080 3036	Second consumer party name / Andet disponentnavn		
	C059 3042	Street name line 1	Valid only for reason for transaction E01 (Move) and E06 (Unrequested Change of supplier). This is the contact address for the customer in moving. Specified as the name of the street in up to two data elements and the street number including house number, floor, direction and door number. The house number does not need to be present, if this is not recorded in the system. In the fourth of repetition of C059/3042 it is possible to state coded address configured as address codes from the CPR register separated by semicolon as follows: Municipality code; (n4) Street code; (n4) House number; (an4) Floor; (an4) Direction/door number; (an4) Country code must be stated as two letter ISO 3166 country code.	Consumer party contact address / Disponent adresse
	C059 3042	Street name line 2		
	C059 3042	House number		
	C059 3042	Coded address		
	3164	City name (fx Fredericia)		
	3251	Postal code (fx 7000)		
	3207	DK		
C186 6063	'220' = Meter reading			
C186 6060	Quantity			
C186 6411	'MTQ' = Cubic Metre			
SG 12 NAD Occurrence 4	3035	'DDQ' = Balance supplier (Balance power supplier) / El-leverandør/gasleverandør	The party id of the Balance Supplier for the metering point. Both EAN-GLN and EIC can be used.	Balance supplier party id / Leverandør id
	C082 3039	Balance supplier ID		
	C082 3055	'9' = EAN (International Article Numbering association) '305' = ETSO (EIC, ETSO Identification Code)		
SG 0 UNT	0074	Number of segments in the message	The message reference should be equal to SG 0 UNH 0062.	<i>Not specified in the dependency matrix, but must be included in the message</i>
	0062	Message reference number		